



Chesterfield™ 2.0
Luxury Vinyl Plank

Chesterfield 2.0

Luxury Vinyl Plank

Chesterfield™ 2.0 is designed to complement any space of your home, featuring a range of modern and classic timber designs.

Crafted with the latest durable technology in Luxury Vinyl flooring, Chesterfield™ 2.0 offers great cleanability, low maintenance, and superior durability suitable for families with children and pets. Enjoy floors that will stand up to scuffs, scratches, dents, and have your floors looking newer for longer.

Features & Benefits

The PUR coating provides a protective barrier against damage from foot traffic, spills, stains, and abrasion. This coating is resistant to stains, making it suitable for a range of environments in which spills may occur. The superior durability guarantees a low maintenance and easy to clean home.

Enjoy long-lasting beautiful floors suited to the entire family, available in a range of modern and Australian inspired timber designs.



Durable

Domestic Heavy Duty (23) and offering long term durability.



Low Maintenance

Easy to clean PUR coating for low maintenance and resistance to spills and scratches.



Pet Friendly

Resistant to scratches, stains, and spills - suitable for all household pets.*



Waterproof Surface

Not affected by spills, suitable for spill prone living areas. Suitable for kitchens.*



Kid Friendly

Low maintenance, resistant to spills and stains.



Residential Warranty

15 year residential warranty* Commercial warranty on request.



Micro-bevelled

Provides a realistic and authentic timber-look.



Stain Resistant


PUR coating for improved stain resistance, ideal for kitchens.

*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or armstrongflooring.co.nz or contact our Head Office, or for the commercial warranty, contact your Armstrong Flooring representative.

Chesterfield 2.0 Grand Oak


A warm and comforting colourway that brings a homely feel to any space, Grand Oak is an authentic Australian hardwood design.

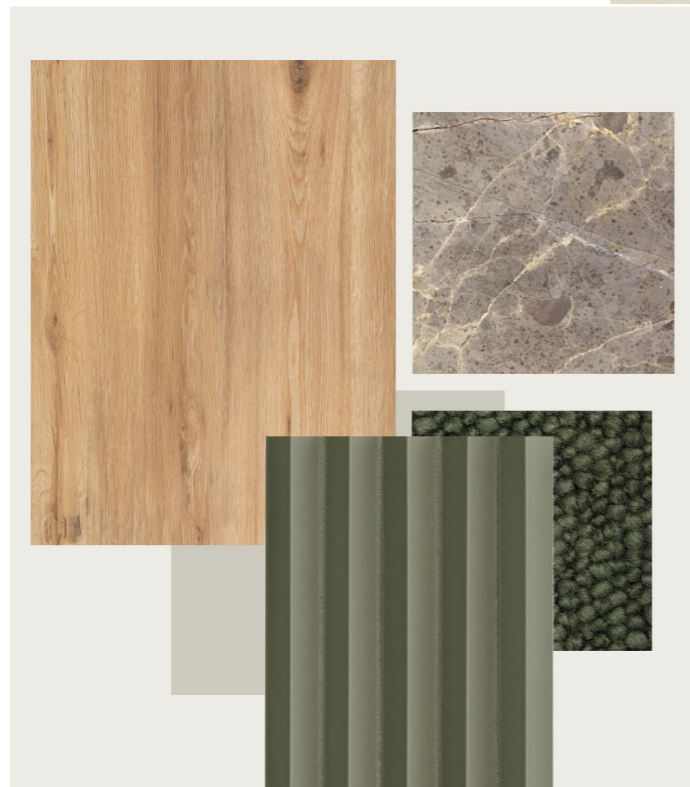



Chesterfield 2.0 Fortuna Oak

A subtle and warm oak design that complements any space and suitable for both modern or classic home interiors.

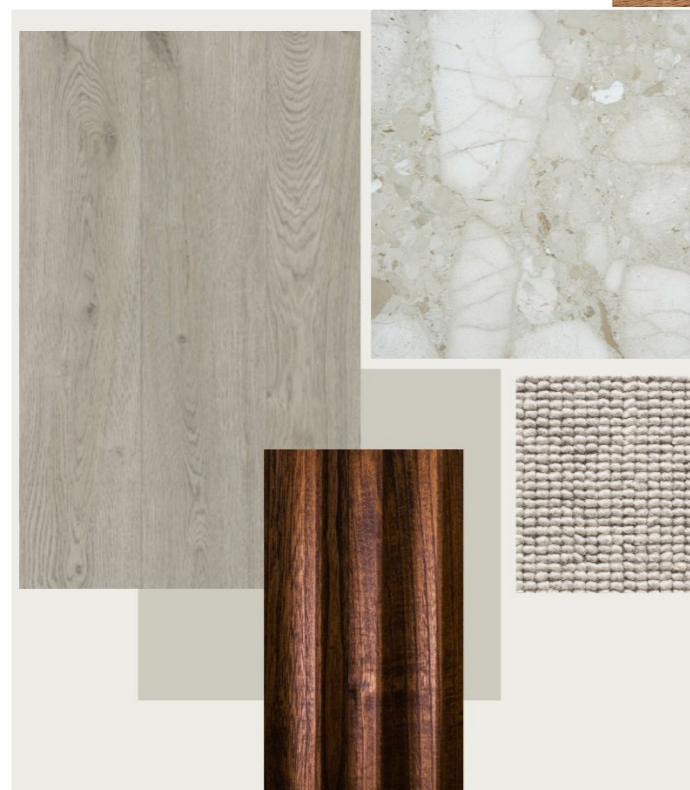

Chesterfield 2.0
1219 x 184 x 2mm



Seasoned Spotted Gum | 320



Natural Spotted Gum | 360



Stirling Oak | 110



Fortuna Oak | 120



Select Tassie Oak | 430



Prime Tassie Oak | 450



Java Oak | 140




Grand Oak | 150

Chesterfield 2.0
1219 x 184 x 2mm



Tobacco Oak | 160

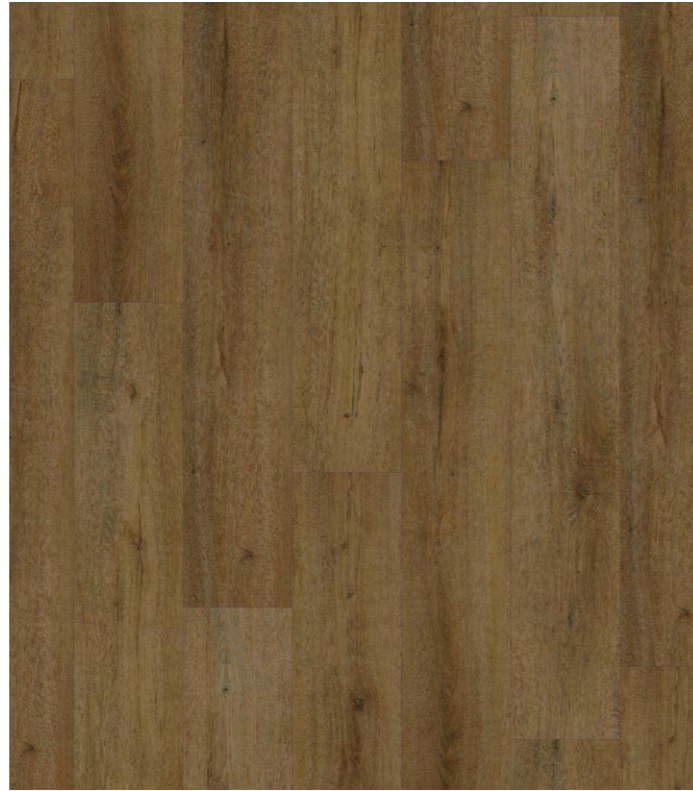

Havana Oak | 175



Silky Blackbutt | 220



Grand Blackbutt | 250



Chesterfield™ 2.0

Product Specifications

Product Classification

Type of floor covering	EN ISO 10582	Luxury Vinyl Plank
Classification	ISO 10874	Domestic Heavy Duty (23)
Warranty	Domestic	15 years
	Commercial - available upon request	3 years

*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or armstrongflooring.co.nz or contact our Head Office, or for the commercial warranty, contact your Armstrong Flooring representative.


Product Structure

Dimensions (mm)	1219 x 184 x 2mm
Surface treatment	PUR > 48% clear
Wear layer (mm)	0.3
Bevel	Micro
Installation	Glue down in accordance with current installation guide and AS1884

Packaging

Planks/carton	20
m ² /carton	4.49
Kg/carton	16

Product Structure

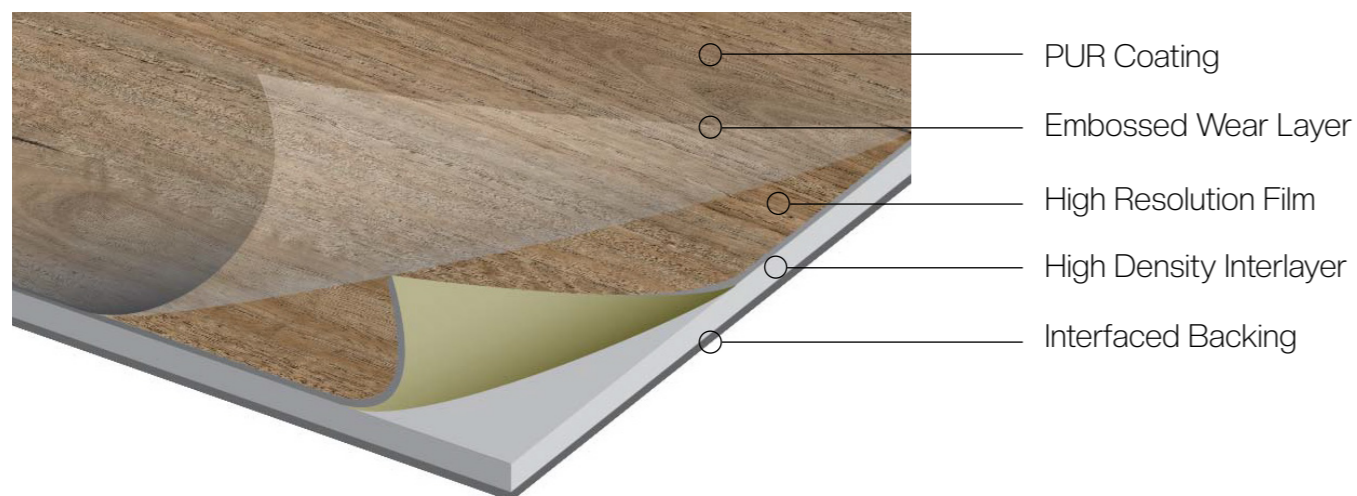

Product Testing

		Standard	Requirement	Result
Slip	Wet Pendulum	AS4586	-	P3
Fire	Critical radiant flux	AS ISO 9239-1	≥ 4.5kW/m ²	10.4 kW/m ²
	Smoke development rate	AS ISO 9239-1	≤750%.minutes	95%.minutes
Acoustic	Impact sound insulation <small>(150mm concrete with 3mm underlay and drop ceiling)</small>	ISO 10140-3 ISO 717-2	≤ 62dB	Ln,w = 43dB (5 Star)
	Impact insulation class <small>(50mm concrete with 3mm underlay and drop ceiling)</small>	ASTM E989-21	-	IIC = 67
Surface	Abrasion	EN660-2	-	Group T
	Martindale (wear resistance)	EN16094	MSB-B2	MSR-B1
	UV adhesion	-	≥ 2	2
	Colour fastness	ISO 105-B02	≥ 6	6
Core	Dimensional tolerance	EN427	Length ± 0.30mm Width ± 0.12mm	Length 0.01mm Width 0.00mm
	Peel strength	ISO 24345	> 50N	97N
	Shrink-vertical % (80°C 6hr)	ISO 23999	≤ 0.25%	0.067
	Shrink-horizontal % (80°C 6hr)	ISO 23999	≤ 0.25%	0.059
	Curling (80°C 6hr)	ISO 23999	≤ 2 mm	0.9mm
	Residual indentation	ISO 24343	≤ 0.10mm	0.026mm


Sustainability

Global GreenTag	GreenRate Level A
-----------------	-------------------



Explore the range

www.armstrongflooring.au/chesterfield2.0



www.armstrongflooring.co.nz/chesterfield2.0



ArmstrongFlooring™

Australia

29-39 Mills Road, Braeside VIC 3195

1800 632 624

customerservices@armstrongflooring.au

www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021

0800 449 649

customerservices@armstrongflooring.co.nz

www.armstrongflooring.co.nz