

# Blacktex Collection

**Width:** 4m

**Wear Layer:** 0.40mm

**Warranty:** 10 Years

**Slip Resistance:** R10



Safira 996M




White Oak 997D



Columbian Oak 939L



Venice Wood 969D



Venice Wood 196L



Zinc 976M



Zinc 996D



White Oak 979L



Venice Wood 969D

Product Information

Norm	EN ISO 26986		* check individual ref. for available widths	
Intensity of use	ISO 10874 (EN 685)		23 Domestic heavy 32 Commercial general 41 Industrial moderate	class
Total Thickness	EN ISO 24346 (EN 428)		2,80	mm
Wearlayer	EN ISO 24340 (EN 429)		0,40	mm
Abrasion group	EN 660-2		T	class
Total weight	EN ISO 23997 (EN 430)		1950	g/m <sup>2</sup>
Standard width	EN ISO 24341 (EN 426)		2 - 3 - 4 *	m
Standard length	EN ISO 24341 (EN 426)		+/- 30	m

Technical Information

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40	%
Curling	EN ISO 23999		≤ 8	mm
Light stability	EN ISO 105 B02		≥ 6	degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,20	mm
Impact sound improvement	EN ISO 717/2		Δ Lw 15	dB
Dynamic coefficient of friction	EN 13893		> 0,6	
Slip resistance (ramp test with oil)	DIN 51130		R10	scale
Reaction to fire Report number ---- VNLf 031380.4	EN 13501-1		Bfl-s1	class
Underfloor heating	EN 12667		Suitable	
Thermal resistance	ISO 8302		0,018	m <sup>2</sup> K/w
Thermal conductivity	EN 12524		0,16	W/m.K
Chemical resistance	ISO 26787 (EN 423)		resistant	
Static Electrical Propensity	EN 1815		< 2kV	On concrete

Environment

- 100% Recyclable.
- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers

**E1** APPROVED FOR EMISSIONS  
E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m<sup>3</sup> of air)

100% phthalate free  
\*for all products produced from May 2017 onwards


This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.

**EMISSIONS DANS L'AIR INTÉRIEUR**  
**A+**  
Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)

- floor score
- BB
- Slovenian plant Certifié ISO 14001
- Slovenian / Belgium plant Certifié ISO 9001

Product Build

1. PU lacquer
2. Wear layer
3. Design layer
4. Foam layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

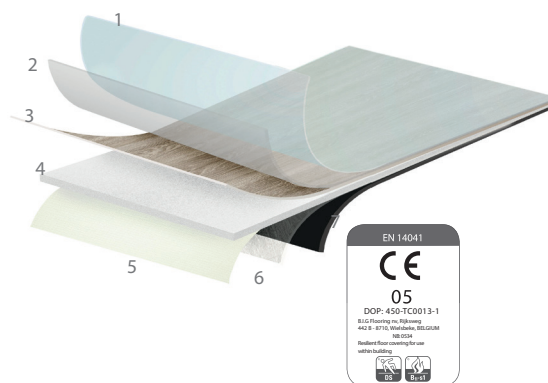

Features

BLACK TEX BAG

PU LACQUER

SLIP RESISTANCE  
R10 CLASS

SLIP RESISTANT

NATURAL LOOK

10 YEARS WARRANTY

5 YEARS WARRANTY

FLOOR HEATING

RESIDENTIAL      COMMERCIAL