

Laminate Incizo® Profile



The profile with Incizo® technology provides a simple solution for a perfect finish to your laminate floor. You can create any profile imaginable with the knife supplied: expansion profile, adapter profile, transition profile and also an edge profile. Furthermore the Incizo profile can also be used to finish your stairs.

The Incizo® profile provides a handy and economic solution.

Contents: Incizo profile, multifunctional rail and a slitte.

Specifications

- **Excellent wear and scratch-resistant surface** - The durable surface makes the Incizo® profile resistant to scratches and wear.
- **No inconvenient seams** compared to other multifunctional profiles
- **Watertight glued HDF base** - The main component of the Incizo® profile is wood. The HDF base is resistant to dampness, which ensures your profile remains in perfect condition.
- **Multifunctional rail** - Incizo is a multi-functional profile used to finish off your floor in doorways or provide control joints for larger floor applications.
- **Matching accessories** - The Incizo® profile is available in a design and surface structure that matches your floor closely.
- **Economical** - You can use the profile leftovers in other applications, so there is less waste.
- **Easy** - Another added benefit of this multifunctional profile is that you always have the right solution on hand.
- **Complete package** - The rail and slitte are supplied together with the multifunctional profile.

Applications

Wood is the main component of your floor. Room humidity may vary from season to season, so it is vital that the floor is able to expand and contract. The floor must be able to expand and around the the entire perimeter of the floor. This is why an expansion gap of 8-10 mm must be provided around the floor. The Incizo® profile can be used to finish this gap.

The Incizo® profile can be used in 5 different applications.



1. EXPANSION PROFILE

The expansion profile is used to join two floors in: doorways, door openings, L-shaped rooms or rooms where the floor is greater in distance than 13 m in length or width.



2. ADAPTER PROFILE

The adapter profile ensures a smooth transition from a floor and an alternative floor covering at a lower height, like tiles or vinyl.



3. EDGE PROFILE

The edge profile is used to finish the edge of a floor against a vertical surface such as sliding doors, low open windows, a slightly higher doorstep or tiled floor.



4. TRANSITION PROFILE

The transition profile can be used to cover the transition to a fixed carpet, for example.




5. STAIR PROFILE

You can also cover your stairs or steps with planks, in combination with the Incizo profile as a stair nose. In this case, an aluminium subprofile for application on stairs is needed, to be ordered separately.

INSTRUCTIONS FOR USE




Expansion Profile



1. Saw the profile to the right length. Cut away section A and section B with the knife to make the expansion profile. Note: cut both lengths first and then remove both blocks.


2. Make sure you leave enough room between the two surfaces that link the profile when installing the floor. Take into account the expansion joint between the protruding legs of the rail (where the profile will go) and the floor. Saw the plastic rail to the right length and place it centrally on the subfloor in the open space between the two floor surfaces.

3. The rail can be attached in different ways: see further. Press the profile gently from one side to the other into the rail. Press until it is against the floor.



INSTRUCTIONS FOR USE




Adapter Profile



1. First saw the profile to the right length. Cut section A away with the knife to make an adapter profile.


2. Mark on the subfloor where you want the floor to go. Let the underlay continue to just before this line: it is better to place the rail (in which the adapter profile will be clamped) on the subfloor later. Make sure that you lay the floor a sufficient distance away from the edge of the underlay: take into account the expansion joint between the protruding legs of the rail (where the profile will go) and the floor.

3. Attach the plastic rail to the subfloor, with the long lip in the direction of the floor. This can be done in various ways: see further. Press the profile gently from one side to the other in the rail. Press until it is against the floor.



INSTRUCTIONS FOR USE





Edge & Transition Profile



1. First saw the profile to the right length. Cut section B away with the knife to make an edge profile.


2. To install against a vertical surface: Saw the plastic rail to the right length and place it with the lip against the vertical surface, on the base. The lip acts as a distance-holder. Attaching the rail: see further. Make sure there is a sufficient expansion joint between the floor and the legs of the rail in which the profile will be clamped. Press the profile gently from one side to the other in the rail. Press until it is against the floor.

3. To install against a vertical surface: Identical to the installing of the adapter profile.




INSTRUCTIONS FOR INSTALLATION

Multifunctional Rail



Normal installation:

See diagram

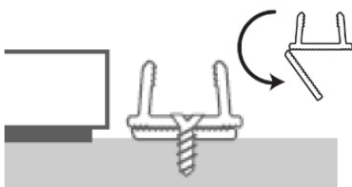


Installation with considerable height differences (from 17 mm onwards):

Break off the long lip from the rail at the groove, across the whole length of the rail. Place the broken off piece under the rail to make up for the height difference with the floor. Attach both pieces firmly to the ground.

HOW TO ATTACH:


With screws: The rail can be attached to the subfloor with screws. Use the pre-drilled holes between the legs of the rail for this. Be careful of underground pipes.

With glue: All rails can be attached firmly to the subfloor with an extra-strong glue, like a construction adhesive also known as liquid nails. You do not need to worry about underground pipes as you do when using screws. This glue also has a very high initial bonding strength which means the Incizo® profile can easily be pressed into the rail immediately.



USING THE KNIFE:

BE CAREFUL: the edges of the cut profile and the knife are sharp, always wear gloves.



Always place the profile horizontally on a stable base when cutting. Place the slit at the top of the profile so that the knife below the slit goes in the narrow opening on the head of the profile. When cutting the slit, always keep the profile pressed level and pull it over the profile in the direction of the arrow.

